



ED250 low energy/power operated pedestrian operator

Description

The ED250 full power operator is designed for demanding applications such as retail centers, airports, and health care facilities. Engineered for high traffic entrances and heavy-duty applications, the ED250 can handle doors up to 800 lb per door leaf.

This heavy-duty operator brings power, security, and wind load control to the most demanding applications with elegance and ultra quiet door operation.

Operator Types and Configurations

- 4" × 6" Narrow Header
 - Surface applied
 - Overhead concealed
- 2-3/4" × 5-1/8" Fine Cover
 - Surface applied

ED250 technical specifications

| Configuration | | | |
|--|---|---|--|
| Header dimensions (H x D x L) | 4" x 6" x length as required (Narrow) 2-3/4" x 5-1/8" x length as required (Fine) | | |
| Operator weight | 26.5 lb | | |
| Internal power supply available for accessories | 24 volts DC ± 5% 1.5 Amps | | |
| Maximum door opening angle | 110° (door stop recommended) | | |
| Maximum wire size | 16 AWG | | |
| Maximum door weight* Based on prevailing conditions at the opening. | 800 lb at maximum door width of 48" Low Energy [ANSI A156.19] For Full Energy [ANSI A156.10] applications with door weights above 200 lbs. contact Technical Support. | | |
| Door width | Minimum 28" Maximum 52" | | |
| Door width for fire protection | 28" to 55" | | |
| Axle extensions | 13/16" (20 mm) 1-3/16" (30 mm) 2-3/8" (60 mm) 3-9/16" (90 mm) | | |
| Reveal depth for pull arm with track | 1-3/16" (30 mm) | | |
| Max. reveal depth for pull arm with CPD lever & track | 2-1/4" | | |
| Reveal depth for standard push arm | 0 to 9-3/4" | | |
| Reveal depth for deep push arm | 8" minimum to 19-3/4" | | |
| Required operating conditions | | | |
| Ambient temperature | 5°F – 122°F | | |
| Power supply | 115 volts AC ± 10%, 50/60 Hz Maximum 6.6 Amps, (SELV) | | |
| Branch circuit protection (provided by others) | 15 Amps maximum, dedicated branch circuit | | |
| Protection class | NEMA 1 | | |
| Power wiring:black, white, bare copper (ground) | 12 AWG | | |
| Operating noise | Maximum 50 db(A) | | |
| Inputs | | | |
| Activation inputs | X4* | Interior, exterior | Normally open contact |
| Safety sensors | X5 | Swing, approach sides, normally closed contact | |
| Night/bank (intercom system) | X10 57, 57a | 8 to 24 volts DC/volts AC + 5% | |
| Night/bank (key switch) | X1 35, 3 | d2 parameter | Configure for Normally Open or Normally Closed |
| Deactivation of drive function | X6 4, 4a | d1 parameter | Configure for Normally Open or Normally Closed |
| Outputs | | | |
| Door status | X7 97, 98, 99 | Sr parameter | Door closed Common Door open Normally Open Door closed, locked Normally Closed |
| Operating specifications | | | |
| Automatic closing torque, lbf-ft ² | Minimum 14.8 lb f | Maximum 110.6 lb f | |
| Manual closing torque, lbf-ft ² | Minimum 9.6 lb f | Maximum 27.3 lb f | |
| Maximum opening speed, degrees per second ¹ | 60 %/s | | |
| Maximum closing speed, degrees per second ¹ | 60 %/s | | |
| Door closer modes | | | |
| Automatic mode | Designed for automatic access following pulse generation by a motion detector or pushbutton. | | |
| Manual mode | Designed for doors primarily accessed manually. | | |
| Power assist | Available only in door closer mode (hd=1), manual opening. Drive support is automatically adjusted to operator size. | | |
| Integrated functions | | | |
| Hold open time | | | |
| Automatic opening | dd parameter | 0 to 30 seconds | |
| Night/bank | dn parameter | 0 to 30 seconds | |
| Manual opening | do parameter | 0 to 30 seconds | |
| Door blocking behavior | hd parameter | Automatic, manual door modes | |
| Electric strike delayed opening for locking mechanism | Ud parameter | 0 to 4 seconds | |
| Locking device feedback | X3 43, 3 | Motor lock | |
| Wind load control, maximum | Fo, Fc parameters | 33.7 lb f 150 N | |
| Voltage independent braking circuit | Adjustable with potentiometer | | |
| LED status indicators Service manual | Green Red Yellow | 24 Vdc power Error codes Service interval | |
| Program & Exit Only switches | Auto, Close, Open, Exit Only; Off, On | | |
| User interface | 4-button keypad, 2-digit display | | |
| Slot for DORMA upgrade cards | Extension of range of functions | | |
| TMP, temperature management program Service manual | Overload protection | | |
| IDC, initial drive control | Driving phase optimization | | |
| Cycle counter | CC parameter | 0 to 1,000,000 | |
| Power assist function | hA, hF, hS parameters | Drive support for manual opening door | |
| Push & go function | PG parameter | Auto opening of door at 4° open | |
| NOTES | | | |
| ¹ Speeds automatically limited depending on door weight, set during learn cycle. | | | |
| ² In push version of slide channel with track installation type, forces are reduced by approximately 33%. | | | |

Standards of compliance

The ED250 operator is set to low energy (A156.19) conformance from the factory.

Upon installation, the ED250 can be configured to meet ANSI/BHMA A156.19, U.S. Standard for Power Assist and Low Energy Power Operated Doors, or ANSI/BHMA A156.10, U.S. Standard for Power Operated Pedestrian Doors (*additional equipment required).

Low energy power operated door

A door with a power mechanism that opens the door upon receipt of a knowing act activating signal, does not generate more kinetic energy than specified in ANSI A156.19, and includes provisions to reduce the chance of user injury or entrapment. In an A156.19 application, this is achieved utilizing the following design factors:

- Reduced dynamic door panel contact forces
- Reduced static door panel contact forces
- Time delays
- Low opening and closing speeds
- Force limitations
- Signage

Power operated pedestrian door (Full Power or Full Energy)

A door with a power mechanism that opens the door upon receipt of a signal from an activating device or sensor, does not generate more kinetic energy than specified in ANSI A156.10, and includes provisions to reduce the chance of user injury or entrapment. In an A156.10 application, this is achieved utilizing specific variants of the following design factors based on the type of door opening and traffic pattern:


- Guide rails
- Activation sensors
- Presence sensors
- Control Mats
- Safety Zones
- Time Delays
- Closing speed
- Closing Force
- Signage

ED250 Fine Cover surface applied

Plan view


Single push operator

Left hand door shown (right hand opposite)

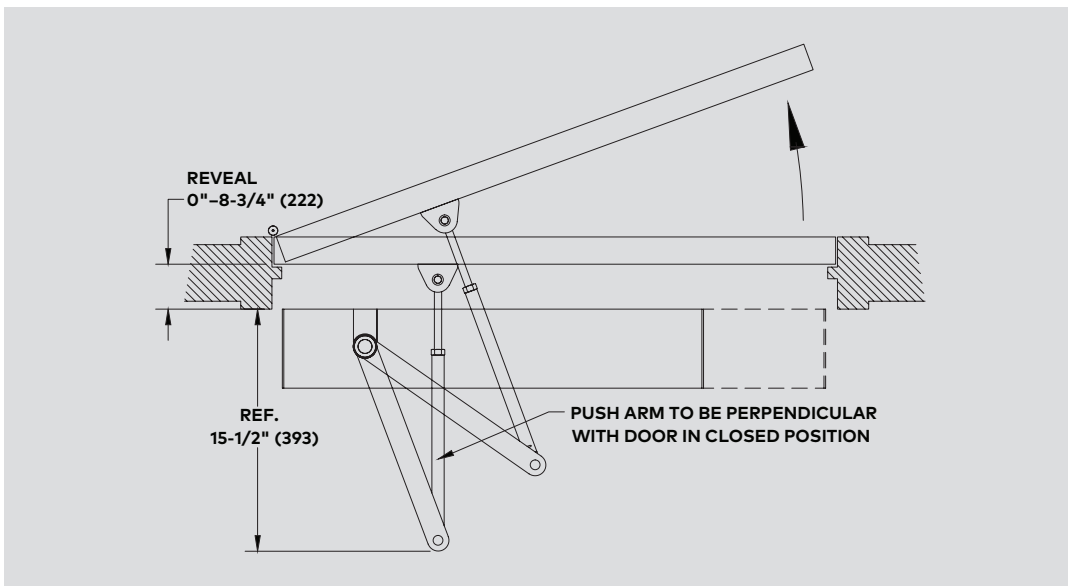


ED250 Fine Cover surface applied

Section view
Push operator
Left hand door shown (right hand opposite)

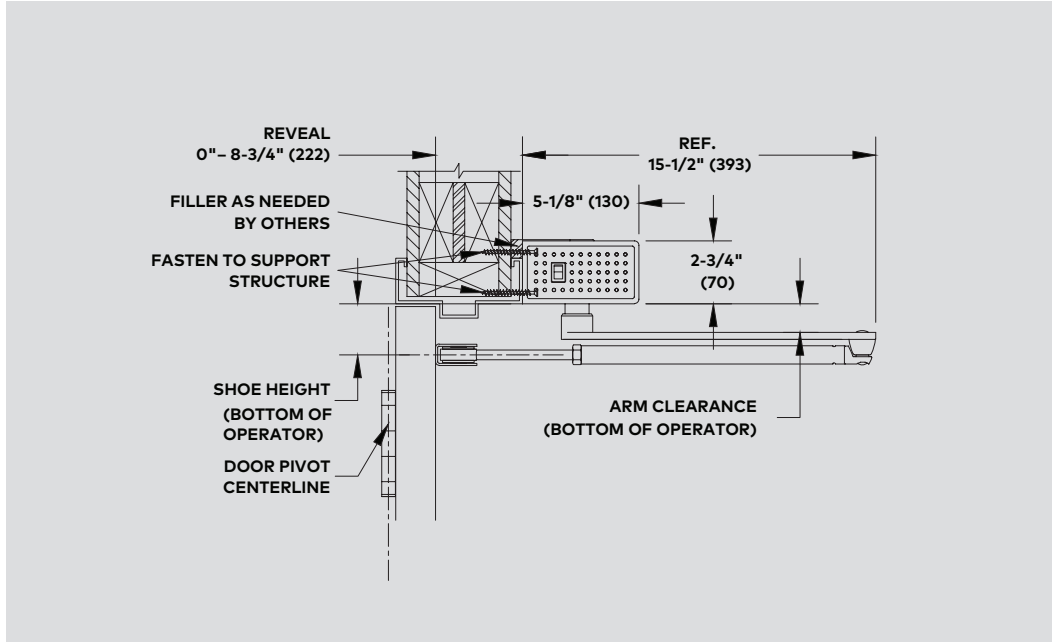

Elevation view
Single Push operator
Left hand door shown (right hand opposite)

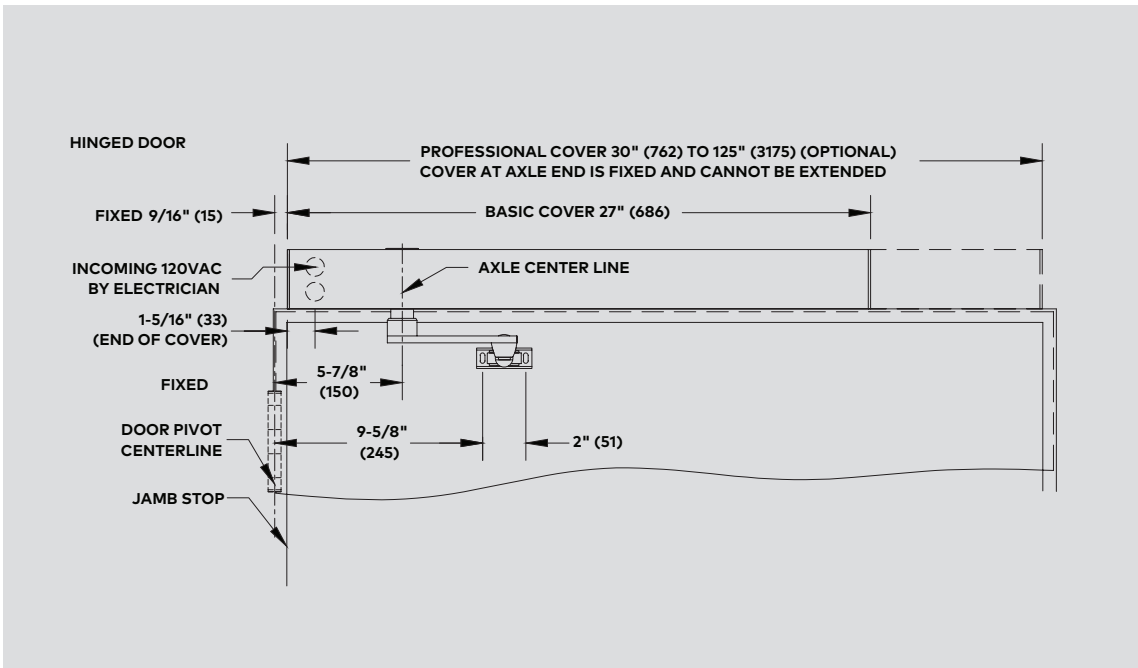


ED250 Fine Cover surface applied

Plan view

Single pull operator


Right hand door shown (left hand opposite)

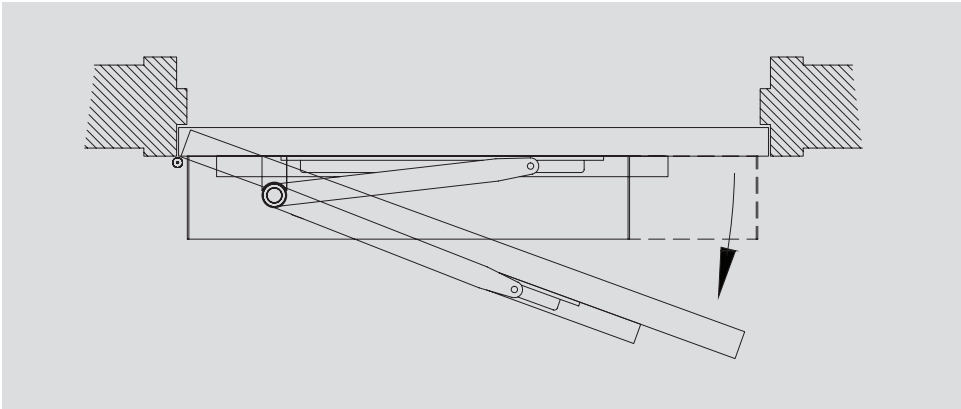

Section view

Pull operator


Right hand door shown (left hand opposite)

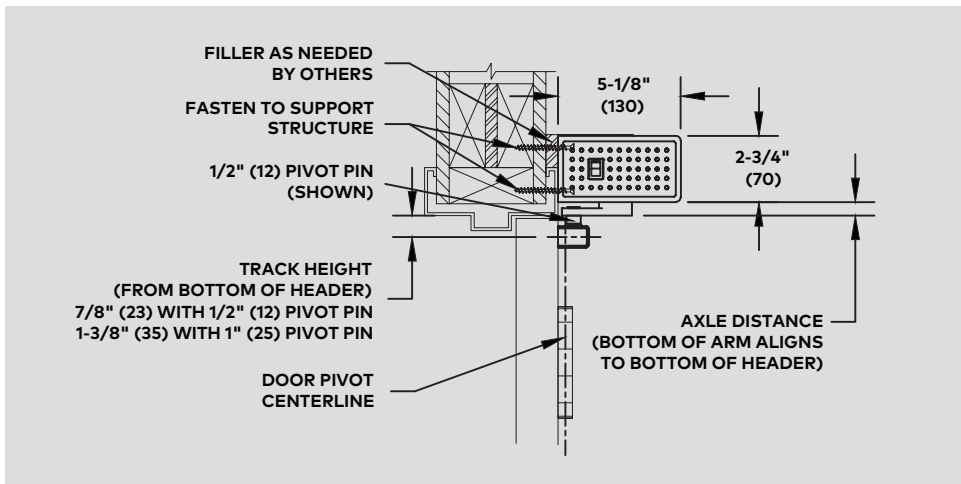

Elevation view


Single pull operator

Right hand door shown (left hand opposite)

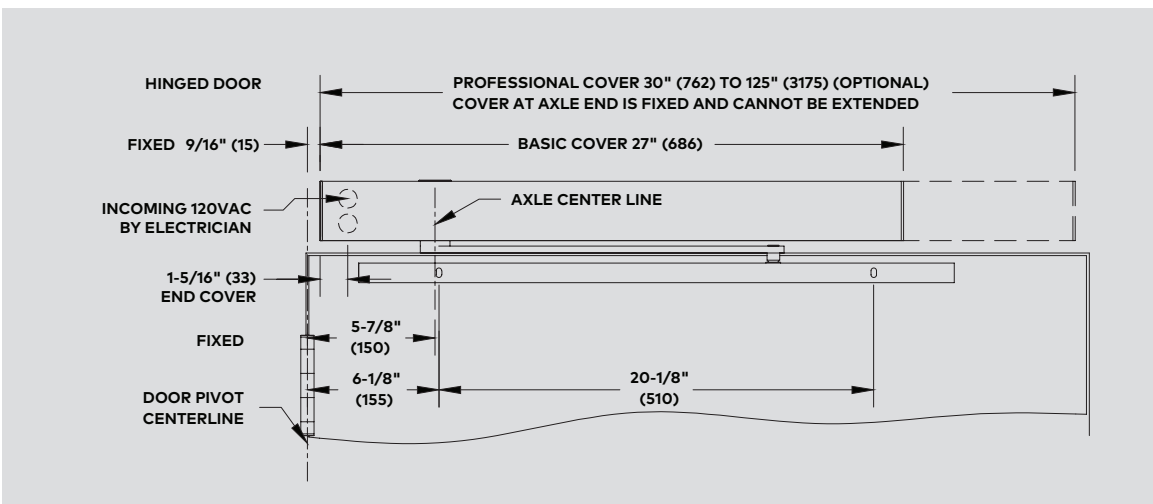


ED250 4 x 6 Narrow Header surface applied


Plan view
 Single push operator
 Left hand door shown (right hand opposite)

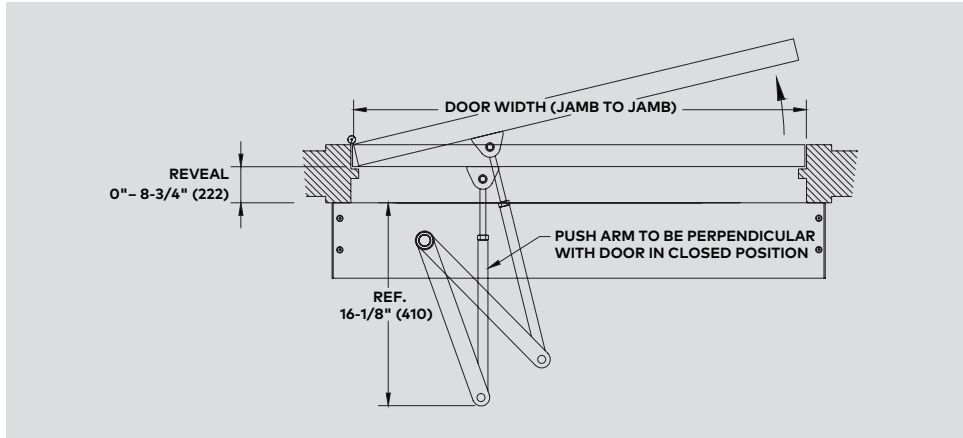

Section view
 Push operator
 Left hand door shown (right hand opposite)

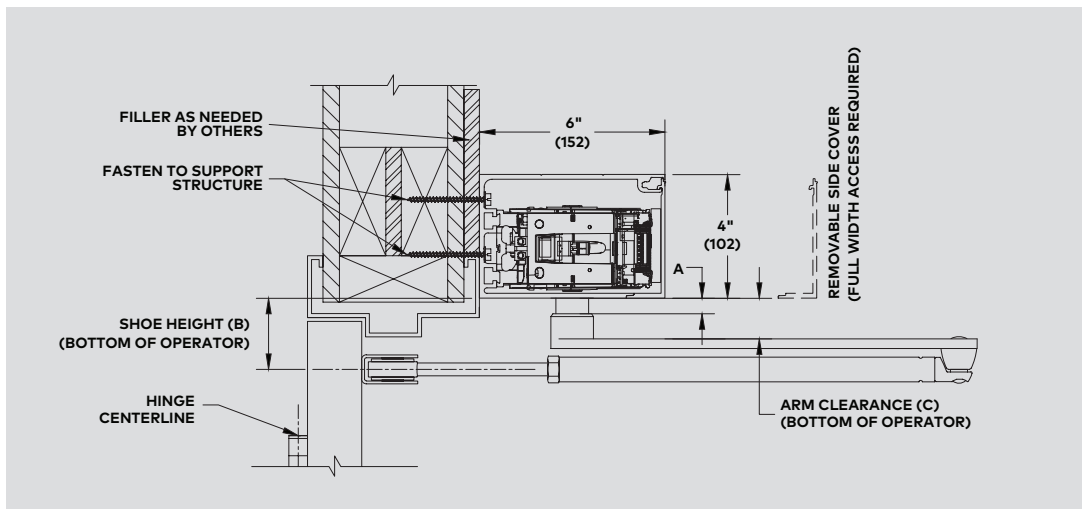

Elevation view
 Single push operator
 Left hand door shown (right hand opposite)

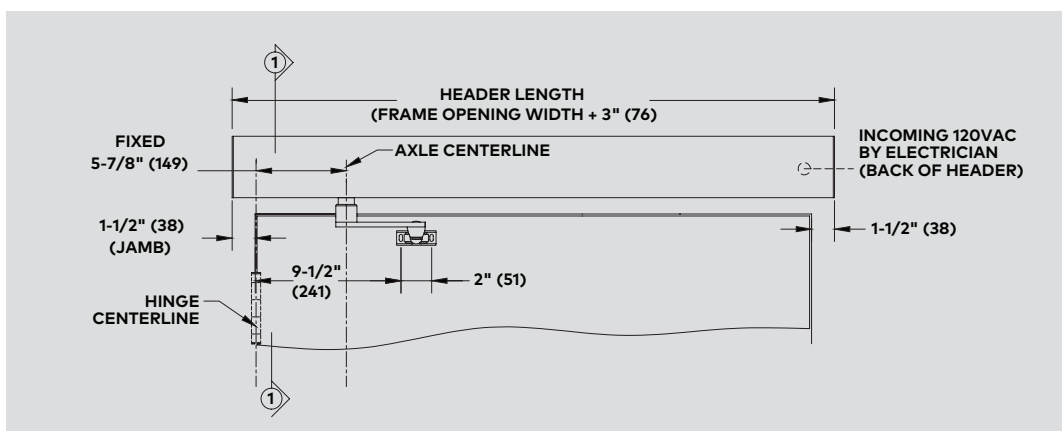


ED250 4 x 6 Narrow Header surface applied

Plan view

Single pull operator


Right hand door shown (left hand opposite)

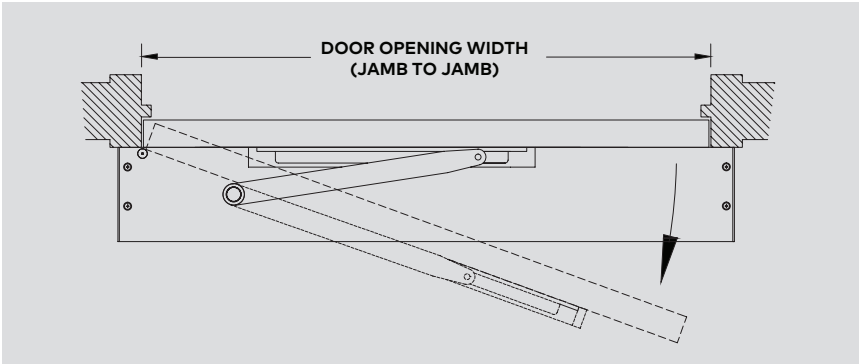

Section view

Pull operator


Right hand door shown (left hand opposite)

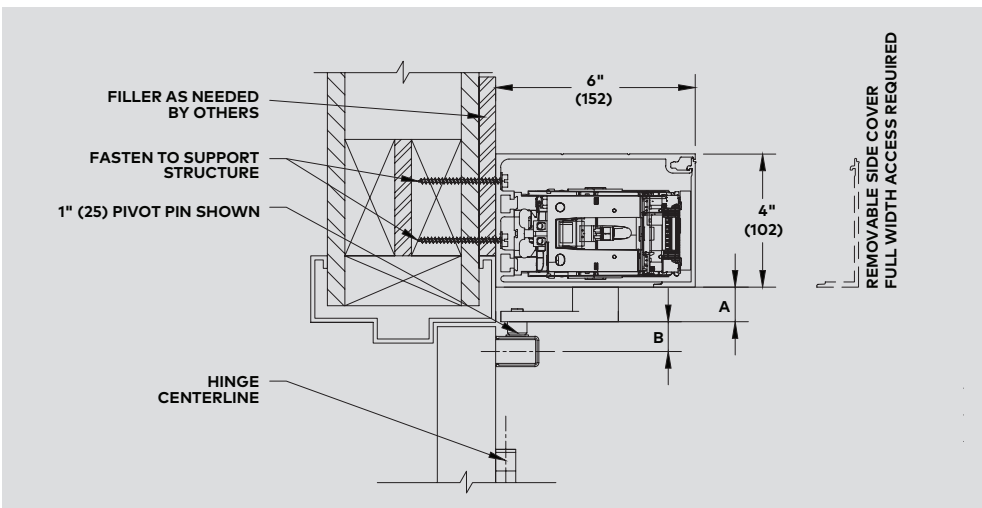

Elevation view

Single pull operator


Right hand door shown (left hand opposite)

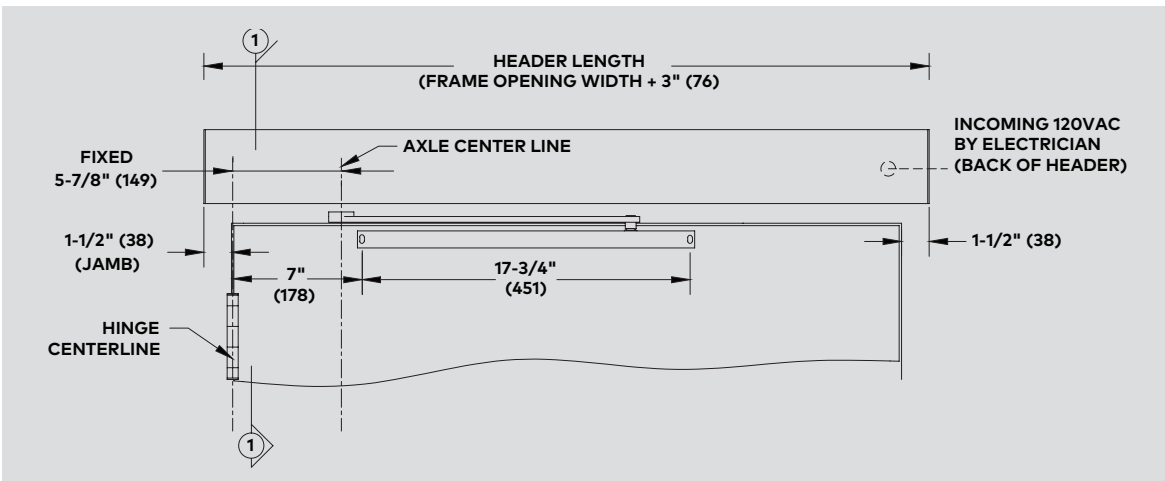

ED250 Overhead concealed


Plan view

Overhead concealed single operator center hung
 Right hand door shown (left hand opposite)

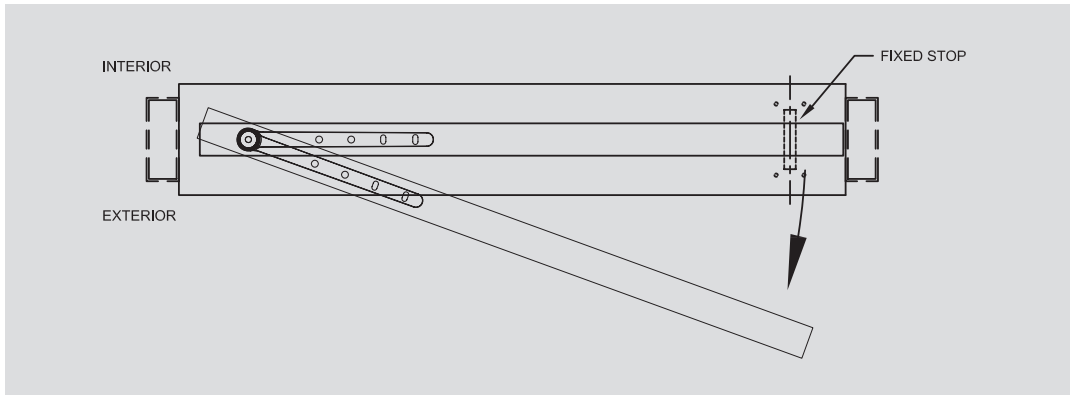


Section view

Overhead concealed operator center hung

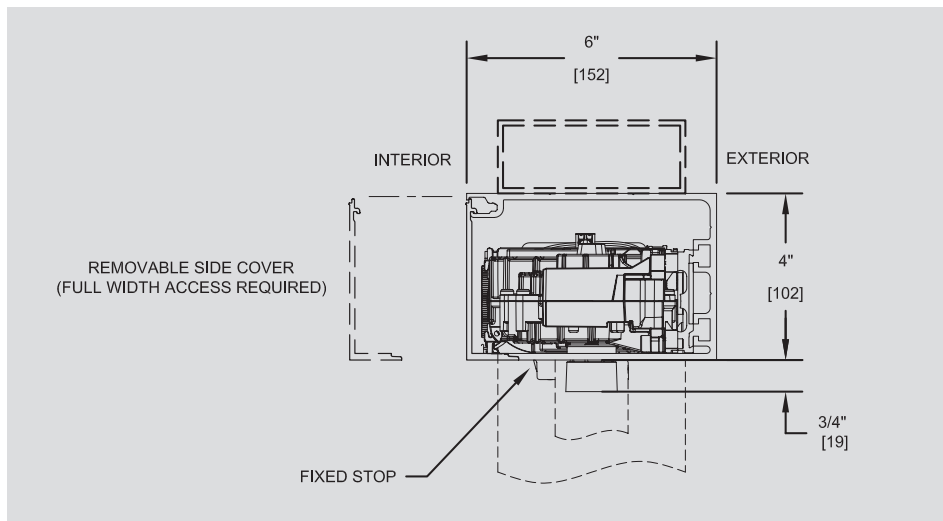

Elevation view


Overhead concealed single operator center hung
 Right hand door shown (left hand opposite)

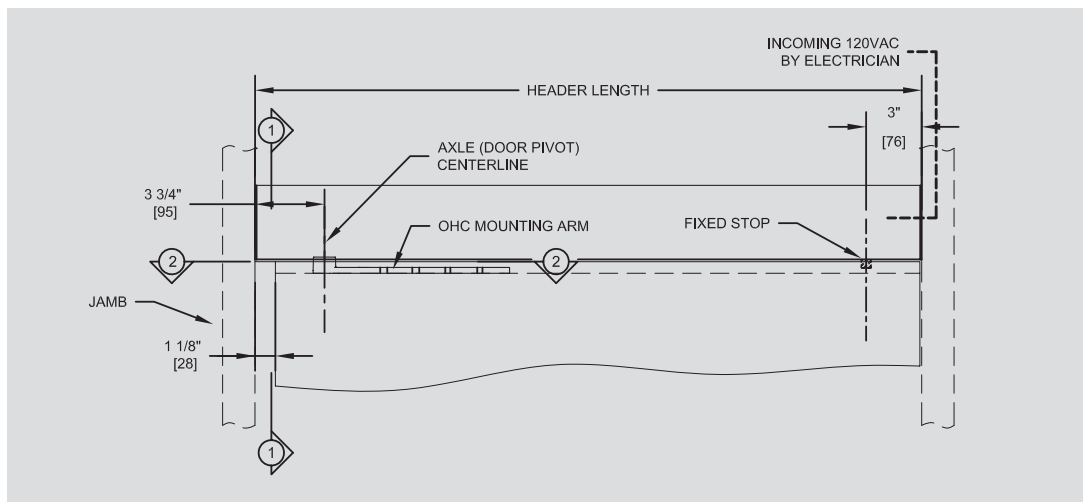

ED250 Overhead concealed


Plan view

Overhead concealed single operator center hung
Left hand door shown (right hand opposite)

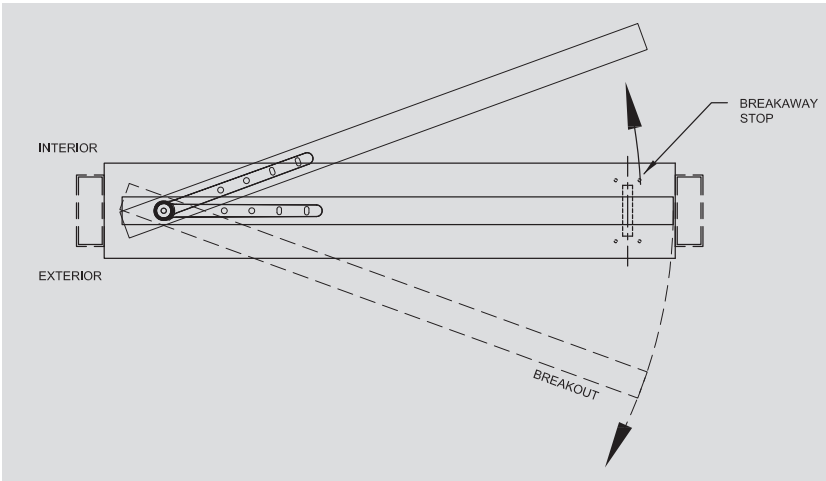


Section view

Overhead concealed operator center hung

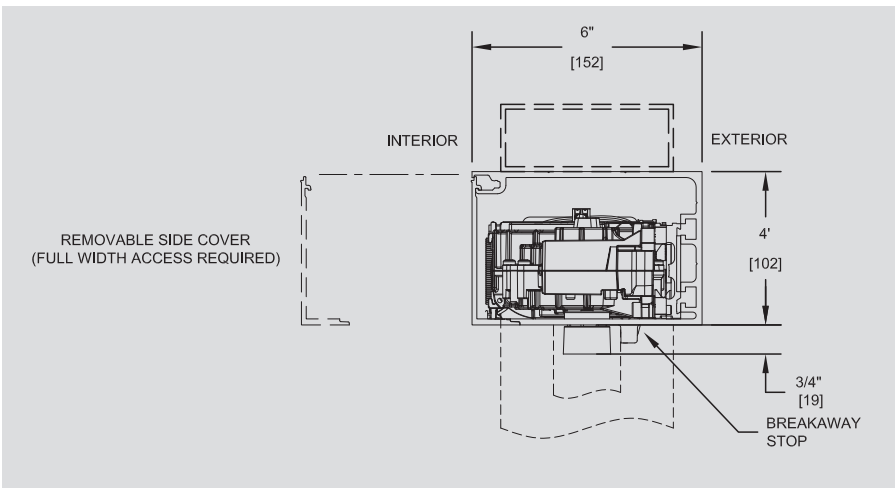

Elevation view

Overhead concealed single operator center hung
Left hand door shown (right hand opposite)

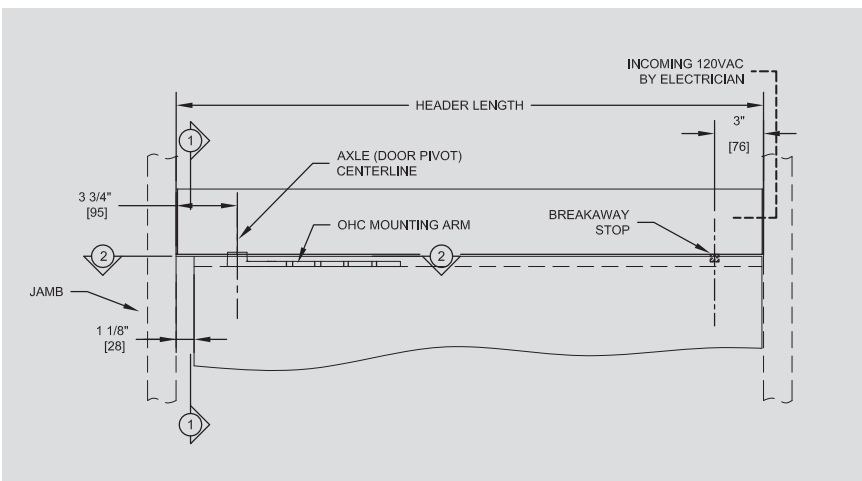

dormakaba USA Inc.
 Dorma Drive, Drawer AC
 Reamstown, PA 17567
 844-SPECNOW
www.dormakaba.us